



RSC4000

Swing Arm Tire Changer

Key Features

- Dual Cylinder Clamping
- Adjustable Jaws
- Built-In Inflator Gauge
- Adjustable Bead Breaker Shovel
- 2 Way Transmission
- Upgraded Mount Head
- Built-In Bead Blaster
- Plastic Protection
- Reinforced Swing Arm
- Filter/Lubricator
- Hex Shaft with Improved lock


Specifications

- Ext. Rim Size: 10"-24"
- Int. Rim Size: 13"-26"
- Rim Width: 3.5"-14"
- Max Tire Diameter: 42"
- Motor: 1 Speed MI
- Electrical: 110V AC
- Bead Breaking Force: 2500 KG



Watch the video



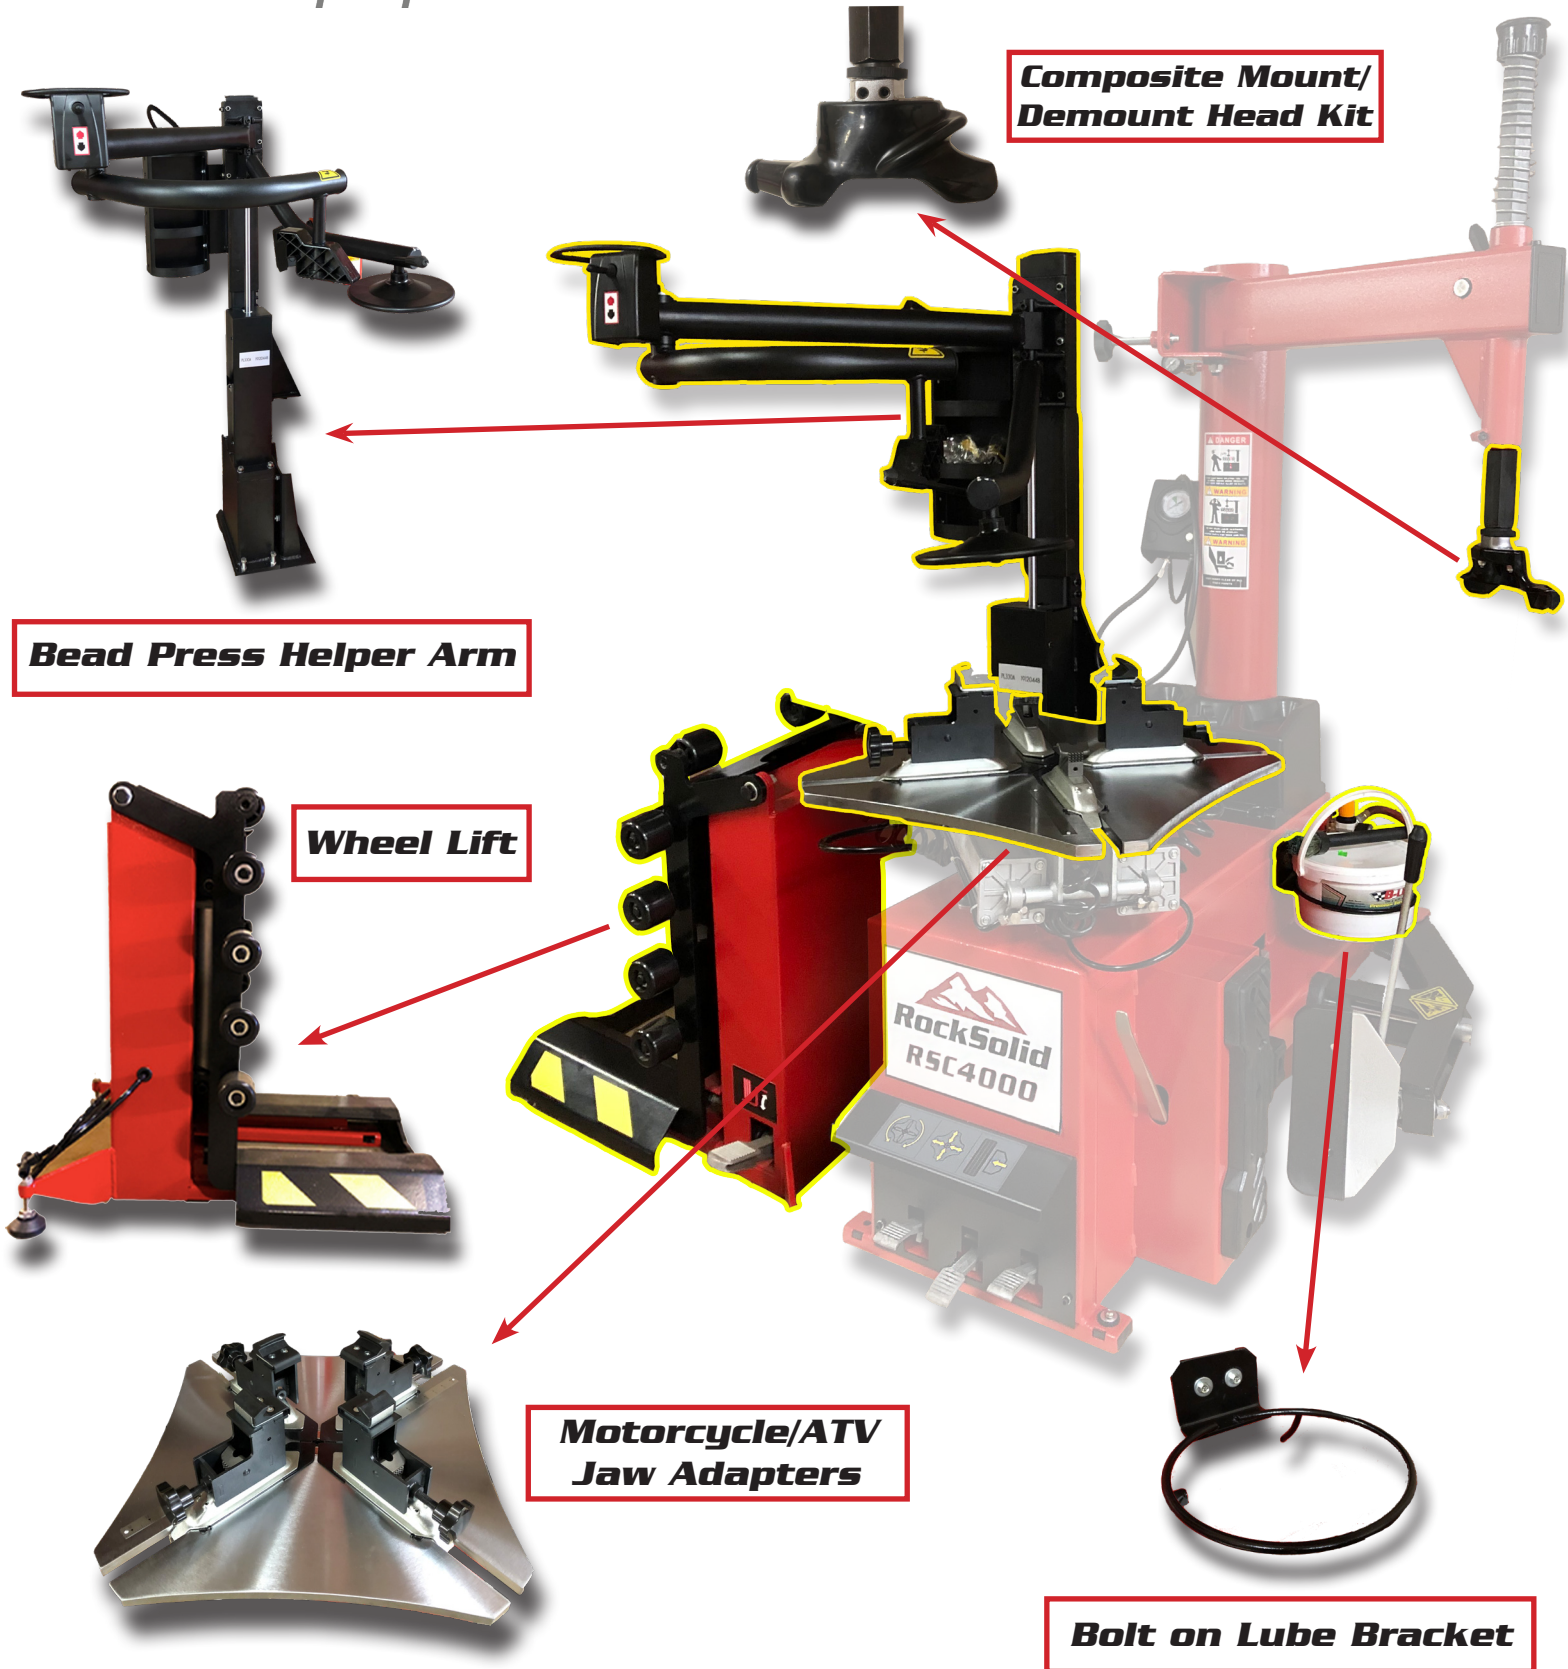

**Composite Mount/
Demount Head Kit**

Bead Press Helper Arm

Wheel Lift

**Motorcycle/ATV
Jaw Adapters**

Bolt on Lube Bracket